

power.com XC

Valve regulated lead-acid batteries



Motive Power Systems

Reserve Power Systems

Special Power Systems

Service

Your benefits with HOPPECKE power.com XC

- **Maintenance-free regarding water refilling** - due to Absorbent Glass Mat-technology
- **Excellent high-current capability** - low investment costs due to innovative electrode structure
- **Optimal space utilization** - due to horizontal arrangement
- **Optimum operational safety** - integrated backfire protection and central degassing system
- **Higher short-circuit safety even during the installation** - based on HOPPECKE system connectors
- **Easy assembly and installation** - battery lid with integral handle

Typical applications of HOPPECKE power.com XC

- **Uninterruptible power supply (UPS)**
- **Telecommunications**
Mobile phone stations
BTS-stations
Off-grid/on-grid solutions
- **Power supply systems**
- **Emergency lighting**



 **HOPPECKE**
POWER FROM INNOVATION


Type overview

Capacities, dimensions and weights

Type	C ₁₀ /1.80 V Ah	C ₅ /1.77 V Ah	C ₃ /1.75 V Ah	C ₁ /1.70 V Ah	C _{1/2} /1.65 V Ah	C _{1/6} /1.60 V Ah	Weight kg	Length L mm	Width W mm	Height H mm	Fig.
power.com XC 121300	51	48	44	36	31	22	22.1	229	177	230	A
power.com XC 121700	64	60	55	45	38	28	22.7	229	177	230	A
power.com XC 122100	66	64	60	52	46	36	25.3	229	177	230	A
power.com XC 122600	86	82	78	66	57	42	37.1	344	177	230	B
power.com XC 123000	99	94	89	76	65	48	37.7	344	177	230	B
power.com XC 123400	104	100	95	81	73	56	38.4	344	177	230	B
power.com XC 124100	146	137	126	102	88	63	50.7	498	177	230	C
power.com XC 124400	152	142	132	110	95	69	54.2	498	177	230	C
power.com XC 125100	157	151	141	121	108	81	55.9	498	177	230	C
power.com XC 21100	236	218	205	173	147	96	16.1	88.5	181	310	D
power.com XC 21600	360	329	309	257	220	150	21.3	181	127	310	E
power.com XC 21900	435	398	371	302	264	189	25.0	181	154	310	F
power.com XC 22700	655	604	563	459	389	259	36.0	181	225	310	G


C₁₀, C₅, C₃, C₁, C_{1/2} and C_{1/6} = Capacity at 10 h, 5 h, 3 h, 1 h, 1/2 h and 1/6 h discharge

Fig. A




power.com XC 121300 -
power.com XC 122100

Fig. B




power.com XC 122600 -
power.com XC 123400

Fig. C

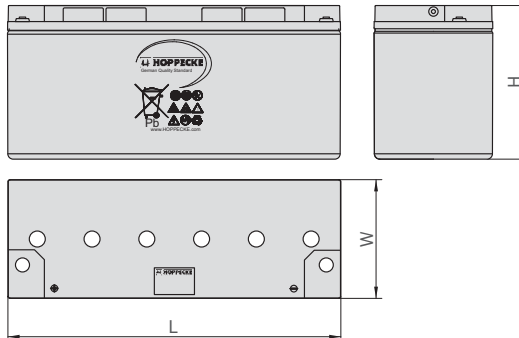


power.com XC 124100 -
power.com XC 125100

Fig. D

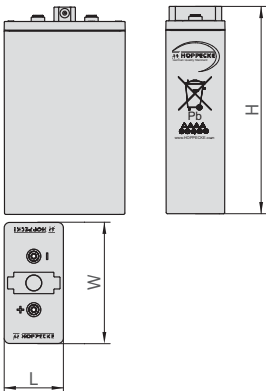


power.com XC 21100

Fig. E

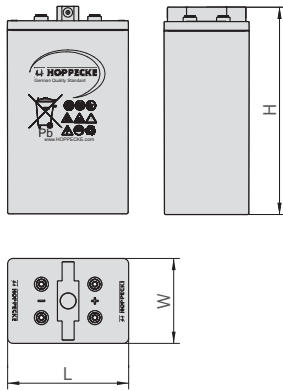


power.com XC 21600

Fig. F

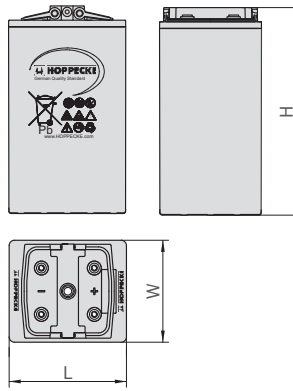

power.com XC 21900

Fig. G

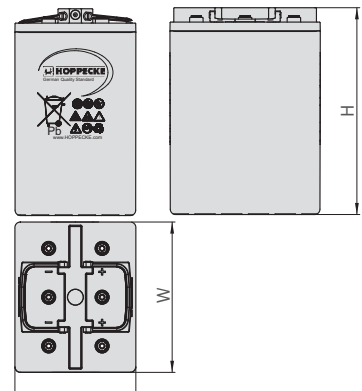

power.com XC 22700

Design life: 10-12 years (according to EUROBAT)

Optimal environmental compatibility - closed loop for recovery of materials in an accredited recycling system